


**MODEL 2230 TRIAXIAL MOUNTING BLOCK**



- Mix and Match up to 3 single axis modules in similar or different g-levels
- Rugged, black anodized, and precision machined 6061-T6 aluminum
- Block mass = 79 grams
- Included hex socket head cap screw fasteners:
  - One (1) 1/4-20x1.5" UNC (9.5 grams, 6 lb-ft)
  - One (1) M6x1x35mm (9.0 grams, 5 lb-ft)
  - Six (6) #4-40x1/2" (0.7 grams each, 4.9 in-lbs)

The 1.25", cube-shaped Model 2230 Block provides a lower cost alternative for configuring a custom orthogonal two or three axis accelerometer.

**MODEL 2230 DIMENSIONS**

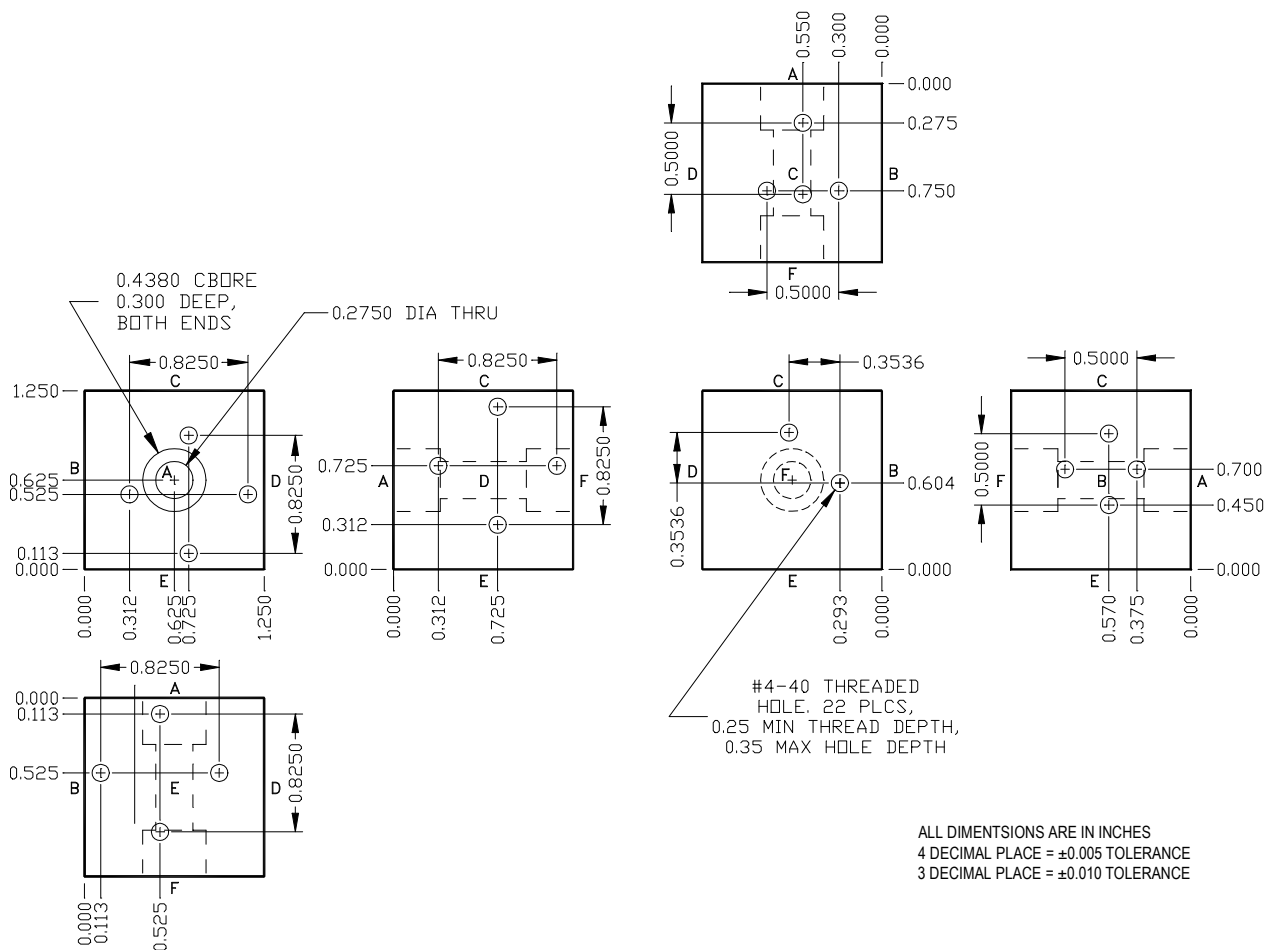

The #4-40x1/2" screws attach your accelerometer(s) to the block. The 1/4-20 or M6x1 screw attaches the block to your work surface.


SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

**MODEL 2235 STUD MOUNT BLOCK**

- Adaptor to stud mount any SDI module
- Rugged black anodized aluminum
- Block mass = 6.2 grams
- Fasteners Included:
  - One (1) #10-32 Captive Screw (1.4 grams)
  - Three (3) #4-40x1/2" (0.7 grams each)



**MODEL 2235 DIMENSIONS**

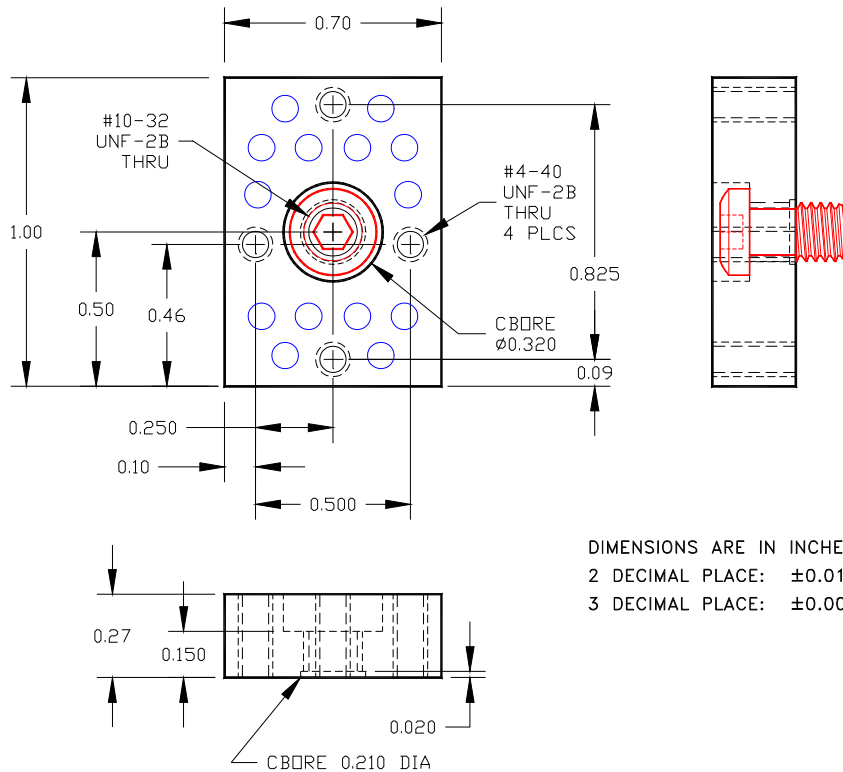

DIMENSIONS ARE IN INCHES  
 2 DECIMAL PLACE:  $\pm 0.010$  TOLERANCE  
 3 DECIMAL PLACE:  $\pm 0.005$  TOLERANCE