



# **CL2-B1 Chlorine Sensor**




## Figure 1 CL2--B1 Schematic Diagram

## **PATENTED**

33

< 13

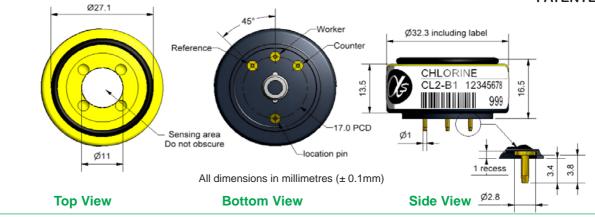

PERFORMANCE	Sensitivity Response time Zero current Resolution Range Linearity Overgas limit	nA/ppm in 10ppm $\text{Cl}_2$ $\text{t}_{90}$ (s) from zero to 10ppm $\text{Cl}_2$ (33 $\Omega$ load resistor) ppm equivalent in zero air RMS noise (ppm equivalent) (33 $\Omega$ load resistor) ppm limit of performance warranty ppm error at full scale, linear at zero and 10ppm $\text{Cl}_2$ maximum ppm for stable response to gas pulse	$ \begin{array}{l} -600 \text{ to } -1150 \\ < 60 \\ \pm 0.2 \\ < 0.02 \\ 20 \\ < \pm 0.2 \\ 60 \end{array} $
LIFETIME	Zero drift Sensitivitydrift Operating life	ppm equivalent change/year in lab air % change/year in lab air, monthly test months until 80% original signal (24 month warranted	< 0.03 < 6 > 24
ENVIRONMENTAL			
	Sensitivity Sensitivity Zero @ -20°C Zero @ 50°C	@ -20°C% (output @ -20°C/output @ 20°C) @ 10ppr @ 50°C% (output @ 50°C/output @ 20°C) @ 10ppm ppm equivalent change from 20°C ppm equivalent change from 20°C	70 to 90 90 to 105 < 0 to 0.1 < 0 to -1
CROSS SENSITIVITY	H <sub>2</sub> S sensitivity NO <sub>2</sub> sensitivity NO sensitivity SO <sub>2</sub> sensitivity CO sensitivity H <sub>2</sub> sensitivity C <sub>2</sub> H <sub>4</sub> sensitivity NH <sub>3</sub> sensitivity CO <sub>2</sub> sensitivity	% measured gas @ 20ppm $H_2S$ % measured gas @ 10ppm $NO_2$ % measured gas @ 50ppm $NO_2$ % measured gas @ 20ppm $SO_2$ % measured gas @ 400ppm $H_2$ % measured gas @ 400ppm $H_2$ % measured gas @ 400ppm $H_2$ % measured gas @ 20ppm $H_3$ % measured gas @ 20ppm $H_3$ % measured gas @ 5% (Vol) $H_3$ $H_3$ % measured gas @ 5% (Vol) $H_2$	-100 100 < 0.5 < -2 < 0.1 < 0.1 < 0.1 < 0.1
KEY SPECIFICATIONS	Temperature range Pressure range Humidity range Storage period	°C kPa % rh continuous (see note below) months @ 3 to 20°C (stored in sealed pot)	-20 to 50 80 to 120 15 to 90 6

Note: Above 85% rh and 40°C a maximum continuous exposure period of 10 days is warranted. Where such exposure occurs the sensor will recover normal electrolyte volumes when allowed to rest at lower % rh and temperature levels for several days.

 $\Omega$  (for optimum performance)



Load resistor

Weight

At the end of the product's life, do not dispose of any electronic sensor, component or instrument in the domestic waste, but contact the instrument manufacturer, Alphasense or its distributor for disposal instructions.

**NOTE:** all sensors are tested at ambient environmental conditions, with 10 ohm load resistor, unless otherwise stated. As applications of use are outside our control, the information provided is given without legal responsibility. Customers should test under their own conditions, to ensure that the sensors are suitable for their own requirements.

Alphasense Ltd, Sensor Technology House, 300 Avenue West, Skyline 120, Great Notley. CM77 7AA. UK
Telephone: +44 (0) 1376 556 700 Fax: +44 (0) 1376 335 899 E-mail: sensors@alphasense.com Website: www.alphasense.com





# **CL2-B1 Performance Data**

#### **Figure 2 Sensitivity Temperature Dependence**

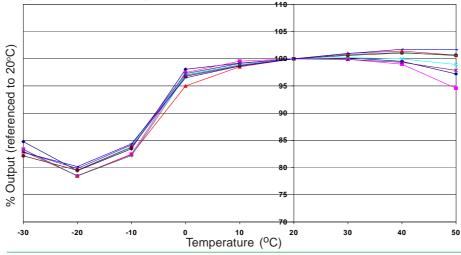


Figure 2 shows the variation in sensitivity caused by changes in temperature.

This data is taken from a typical batch of sensors. The mean and ±95% confidence intervals are shown.

Chlorine gas tests can be difficult and non-repeatable, especially at high temperatures.

### **Figure 3 Zero Temperature Dependence**


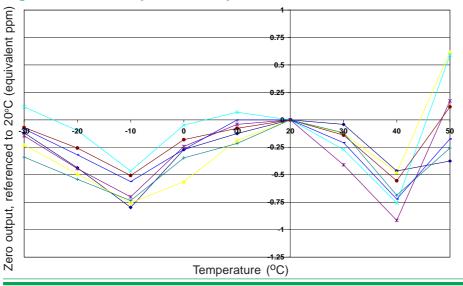


Figure 3 shows the variation in zero output caused by changes in temperature, expressed as ppm gas equivalent, referenced to zero at 20°C.

This data is taken from a typical batch of sensors.

#### Figure 4 Response to high gas concentrations

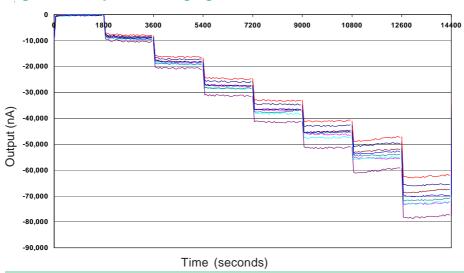

stable response to chlorine gas, up to 80ppm. Sensors recover without any performance change when exposed to high gas concentrations for short periods.

For further information on the performance of this sensor, on other sensors in the range or any other subject, please contact Alphasense Ltd. For Application Notes visit "www.alphasense.com".

In the interest of continued product improvement, we reserve the right to change design features and specifications without prior notification. The data contained in this document is for guidance only. Alphasense Ltd accepts no liability for any consequential losses, injury or damage resulting from the use of this document or the information contained within. (@ALPHASENSE LTD ) Doc. Ref. CL2B1/JAN12